
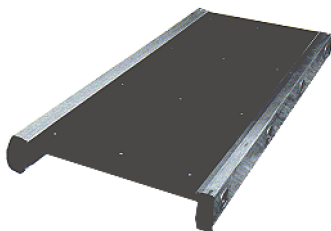


HAYDOX @thewoodyard

The Haydox Lightweight Aluminium Staging

- The innovative design of the frame makes the staging very strong and lightweight.
- The staging has a non-slip plywood working platform, or timber slats, to suit your requirements.
- They are manufactured to BS2073 Class 1.
- Stagings are available in lengths from 2.4m to 7.2m and in both 450mm and 600mm widths, to comply with the 1996 Health & Safety Regulations.
- Staging posts are available to provide a handrail system.

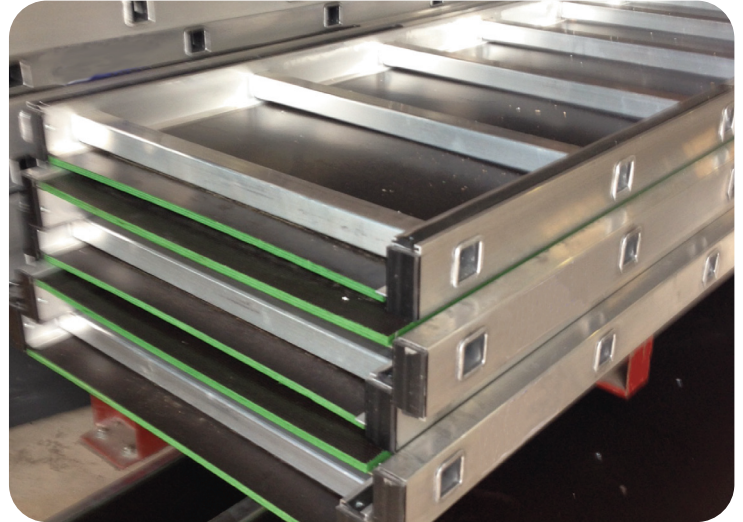

LENGTH	450mm Depth	450mm Weight
2.4m	75mm	12.0 KG
3.0m	75mm	14.0 KG
3.6m	75mm	17.0 KG
4.2m	90mm	20.0 KG
4.8m	90mm	26.0 KG
5.4m	90mm	33.0 KG
6.0m	110mm	36.0 KG
6.6m	110mm	41.0 KG
7.3m	110mm	44.0 KG

LENGTH	600mm Depth	600mm Weight
2.4m	75mm	20.0 KG
3.0m	75mm	24.0 KG
3.6m	75mm	28.0 KG
4.2m	90mm	31.0 KG
4.8m	90mm	40.0 KG
5.4m	90mm	47.0 KG
6.0m	110mm	54.0 KG
6.6m	110mm	63.0 KG
7.3m	110mm	69.0 KG




Green End, Whitchurch, Shropshire SY13 1AS

Tel: 01948 662327 / 01948 666054 Fax: 01948 666359


Email: sales@thewoodyard.org Web: www.thewoodyard.org

HAYDOX @thewoodyard

The Haydox Universal Handrail Post

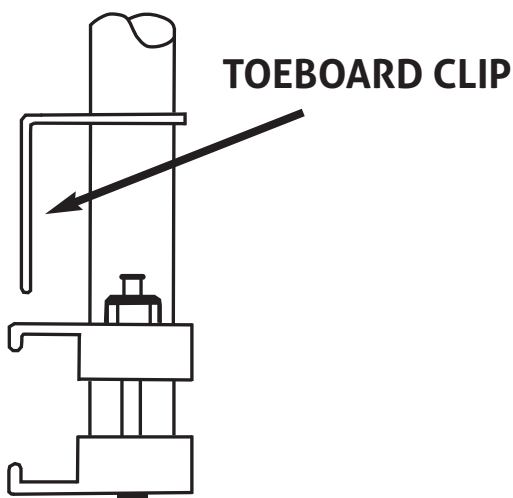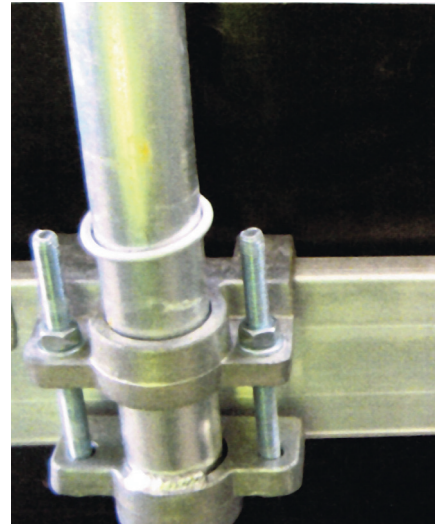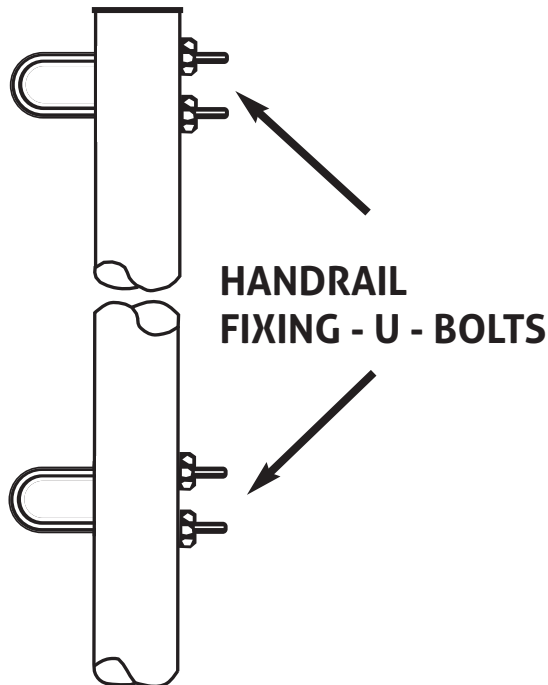

- Universal, fits both 600mm and 450mm wide staging
- Lightweight, made from aluminium
- Conforms to BS1139 Part 3. Also made in conjunction with ISO 9001 Manufacturing Guidelines
- "U" bolt connections at 500mm and 1 metre intervals
- Toeboard clip
- Vice like attachment with nylon thread bolts



SAFETY NOTES

- Regulations state that if a person can fall more than 2m (6'6") then double handrails and toeboards must be fitted and the deck to be 600mm wide.
- For use only on staging with aluminium sides and cross members. Do not use on any wooden sided staging.
- Post should be no more than 2.4m (8') apart.

Green End, Whitchurch, Shropshire SY13 1AS

Tel: 01948 662327 / 01948 666054 Fax: 01948 666359

Email: sales@thewoodyard.org Web: www.thewoodyard.org